




2Y0505WCREB (wall, corridor, radar, emergency,

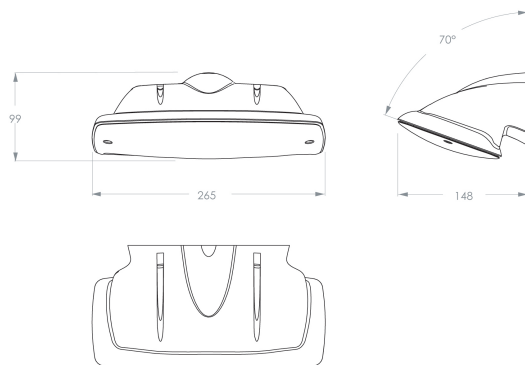

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	Black, RAL7021
Color rendering index (Ra)	>80
Autonomy	adjustable 1 of 3 hours
Impact resistance	IK10
Power factor	0.9
Optics	corridor lens
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Surface mount , Wall
Material housing	Polycarbonate
Maintained / non maintained	ja, instelbaar
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505WCREB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250978




We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

HBI 2Y0505WCRE (wall, corridor, radar, emergency)

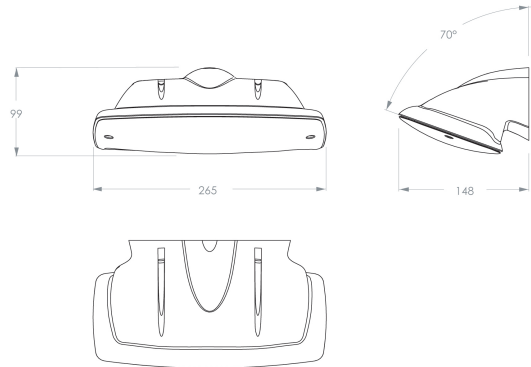

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	grey, RAL7035
Color rendering index (Ra)	>80
Autonomy	1h of 3h (adjustable)
Impact resistance	IK10
Power factor	0.9
Optics	corridor lens
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Surface mount , Wall
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505WCRE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250954




We reserve the right to alter specifications.

Datum download PDF: 13-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



2Y0505WCEB (wall, corridor, emergency, black)

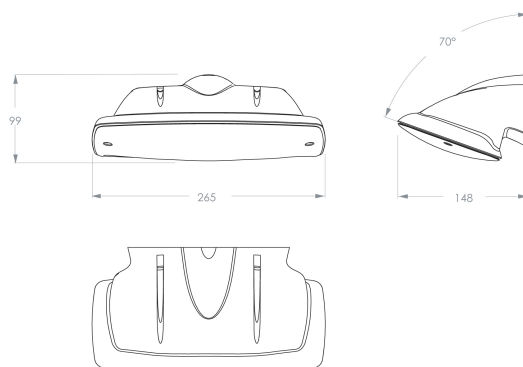

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	black, RAL 7021
Color rendering index (Ra)	>80
Autonomy	1 or 3 hours
Impact resistance	IK10
Power factor	0.9
Optics	corridor lens
Autotest (ATS)	yes
Motion sensor	no
Assembly	Surface mount , Wall
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505WCEB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250930




We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwersweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



2Y0505WCE (wall, corridor, emergency)

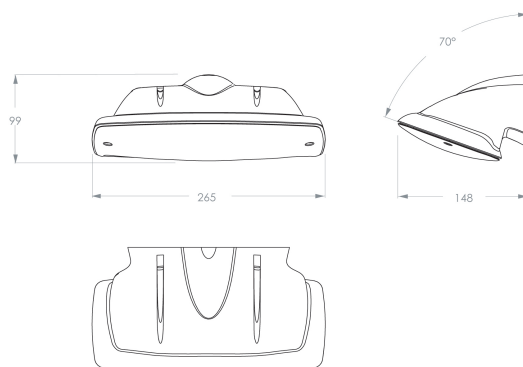

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	grey, RAL7035
Color rendering index (Ra)	>80
Autonomy	1h or 3h (adjustable)
Impact resistance	IK10
Power factor	0.9
Optics	corridor lens
Autotest (ATS)	yes
Motion sensor	no
Assembly	Surface mount , Wall
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505WCE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250916




We reserve the right to alter specifications.

Datum download PDF: 13-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

2Y0505CSREB (ceiling, square, radar, emergency,

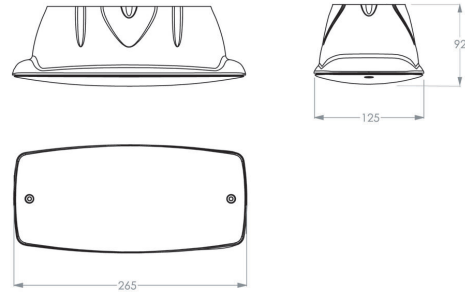

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	black, RAL7021
Color rendering index (Ra)	>80
Autonomy	1h or 3h, adjustable
Impact resistance	IK10
Power factor	0.9
Optics	square lens diffuse
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Surface mount , Ceiling
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CSREB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250893






We reserve the right to alter specifications.

Datum download PDF: 13-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

2Y0505CSRE (ceiling, square, radar, emergency)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	grijs, RAL7035
Color rendering index (Ra)	>80
Autonomy	1 or 3 hours
Impact resistance	IK10
Power factor	0.9
Optics	squarelens diffuus
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Surface mount , Ceiling
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W (100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CSRE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250879





We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



2Y0505CSEB (ceiling, square, emergency)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	Average between -20 and +30
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Gemiddeld tussen -20 en +30
Color housing	zwart, RAL7021
Color rendering index (Ra)	>80
Autonomy	adjustable 1h of 3h
Impact resistance	IK10
Power factor	0.9
Optics	difuse square lens
Autotest (ATS)	yes
Assembly	Surface mount , Ceiling
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CSEB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250855




We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



2Y0505CSE (ceiling, square, emergency)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	Grey RAL7035
Color rendering index (Ra)	>80
Autonomy	instelbaar 1u of 3u
Impact resistance	IK10
Power factor	0.9
Optics	squarelens diffuus
Autotest (ATS)	yes
Assembly	Ceiling
Material housing	polycarbonate
Maintained / non maintained	yes
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W (100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CSE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250831




We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

2Y0505CCREB (ceiling, corridor, radar, emergency,

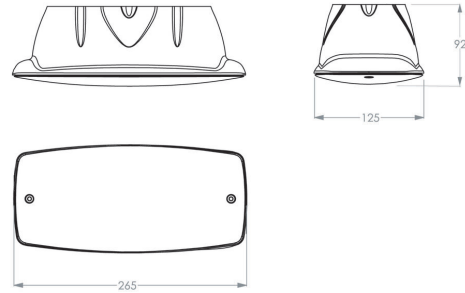

Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	zwart, RAL 7021
Color rendering index (Ra)	>80
Autonomy	1h of 3h
Impact resistance	IK10
Power factor	0.9
Optics	Corridor lens
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Surface mount , Ceiling
Material housing	polycarbonate
Maintained / non maintained	ja
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CCREB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250817





We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

2Y0505CCRE (ceiling, corridor, radar, emergency)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	radar , light sensor , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	grijs RAL7035
Color rendering index (Ra)	>80
Autonomy	1h or 3h
Impact resistance	IK10
Power factor	0.9
Optics	Corridor lens
Autotest (ATS)	yes
Motion sensor	yes
Assembly	Ceiling
Material housing	polycarbonate
Maintained / non maintained	ja
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CCRE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250794






We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

2Y0505CCEB (ceiling, corridor, emergency, black)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	Zwart, RAL7021
Color rendering index (Ra)	>80
Autonomy	1 or 3 hours
Impact resistance	IK10
Power factor	0.9
Optics	Corridor lens
Autotest (ATS)	yes
Motion sensor	no
Assembly	Surface mount , Ceiling
Material housing	Polycarbonate
Maintained / non maintained	ja
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	LoRa; ook verkrijgbaar in 3000K (2Y0505CCEB3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250770





We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



2Y0505CCE (ceiling, corridor, emergency)



Specifications

Family	SERIES 200 POLAREM
Application	Emergency lighting
Light source	5W LED
Functionality	light sensor , battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	570lm (100%); 456lm (80%); 342lm (60%); 228lm (40%); 114lm (20%)
Luminous flux (lm) emergency	365lm (1h) - 122lm (3h)
Ambient temperature (C)	Average between -20 and +30
Color housing	grey, RAL 7035
Color rendering index (Ra)	>80
Autonomy	adjustable 1h of 3h
Impact resistance	IK10
Power factor	0.9
Optics	Corridor lens
Autotest (ATS)	yes
Motion sensor	no
Assembly	Surface mount , Ceiling
Material housing	Polycarbonate
Maintained / non maintained	ja
Ingress protection	IP65
Power consumption	3,3W(20%) - 8,4W(100%)
Insulation class	Klasse II
Light sensor	yes
Details/particulars	ook verkrijgbaar in 3000K (2Y0505CCE3K)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250756



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com