




Specifications


Family	SERIES 600 DISPLAY
Application	Exit sign
Light source	LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	600lm (100%) - 480lm (80%) - 360lm (60%) - 240lm (40%)
Luminous flux (lm) emergency	300lm
Ambient temperature (C)	Average between -20 and +30
Color housing	grijs aluminium
Color rendering index (Ra)	>80
Sizes of packaging (LxWxH)	525 x 280 x 84mm
Autonomy	1 hour of 3 hour (adjustable)
reading distance (m)	52
Impact resistance	IK08
Power factor	0.9
Optics	opaal diffuser
Autotest (ATS)	yes
Assembly	Surface mount , Wall
Material housing	aluminium
Maintained / non maintained	ja
Ingress protection	IP32
Insulation class	Klasse I
Battery pack	HBI NiMh 3.6V 2.2Ah stick Long Life High Temp (art. 94223L)
EAN	8720246250459

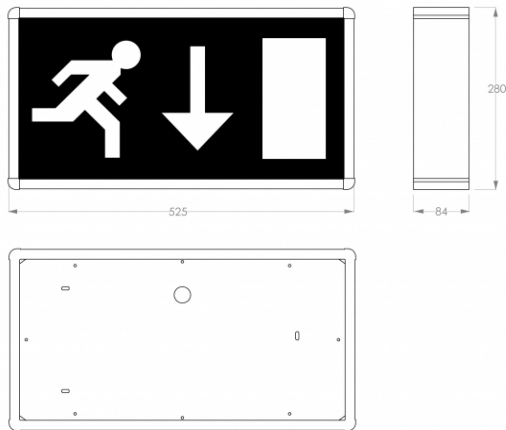

We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

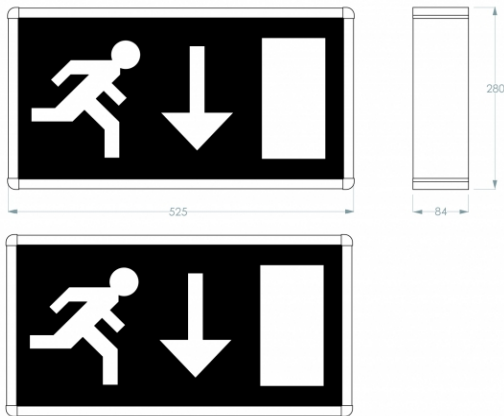

Specifications


Family	SERIES 600 DISPLAY
Application	Exit sign
Light source	LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	200lm (L1) - 600lm (L1+L2)
Luminous flux (lm) emergency	180lm - 1 hour 60lm - 3 hour
Ambient temperature (C)	Average between -20 and +30
Color housing	grijs aluminium
Color rendering index (Ra)	>80
Sizes of packaging (LxWxH)	525 x 280 x 84mm
Autonomy	1 hour 3 hours - adjustable
reading distance (m)	52
Impact resistance	IK08
Power factor	0.9
Optics	opaal diffusor
Autotest (ATS)	yes
Assembly	Surface mount , Ceiling
Material housing	aluminium
Maintained / non maintained	ja
Ingress protection	IP32
Power consumption	5W (L1) - 11,6W (L1+L2)
Insulation class	Klasse I
Details/particulars	lifetime > 100.000hrs (L80/B10)
Battery pack	HBI NiMh 3.6V 2.2Ah stick Long Life High Temp P (art. 94223L)
EAN	8720246250442



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications

Family	SERIES 600 DISPLAY
Application	Exit sign
Light source	6W LED
Functionality	low/high , battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	90 (L1) - 300 (L1+L2)
Luminous flux (lm) emergency	160lm - 1 uur 60lm - 3 uur (adjustable)
Ambient temperature (C)	Average between -20 and +30
Color housing	aluminium grey
Color rendering index (Ra)	>80
Autonomy	1 hour 3 hours - adjustable
Impact resistance	IK08
Power factor	0.9
Autotest (ATS)	yes
Assembly	Wall
Material housing	aluminium
Maintained / non maintained	adjustable
Ingress protection	IP32
Power consumption	4,2W (L1) - 8,3W (L1+L2)
Insulation class	Klasse I
Details/particulars	LoRaWAN; lifetime >100.000 hrs (L80/B10)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250435



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications

Family	SERIES 600 DISPLAY
Application	Exit sign
Light source	6W LED
Functionality	battery pack , low/high
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm)	90 (L1) - 300 (L1+L2)
Luminous flux (lm) emergency	160lm - 1 uur 60lm - 3 uur (adjustable)
Ambient temperature (C)	Average between -20 and +30
Color housing	gray aluminum
Color rendering index (Ra)	>80
Autonomy	1 hour 3 hours - adjustable
reading distance (m)	32
Power factor	0.9
Autotest (ATS)	yes
Assembly	Surface mount , Ceiling
Material housing	aluminium
Maintained / non maintained	adjustable
Ingress protection	IP32
Power consumption	4,2W (L1) - 8,3W (L1+L2)
Insulation class	Klasse I
Details/particulars	LoRaWAN; lifetime >100.000 hrs (L80/B10)
Battery pack	NiMh 3,6V 2,2Ah Long Life High Temp
EAN	8720246250428



We reserve the right to alter specifications.

Datum download PDF: 13-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com