




Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	wit, Ral 9002
Color rendering index (Ra)	80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251562

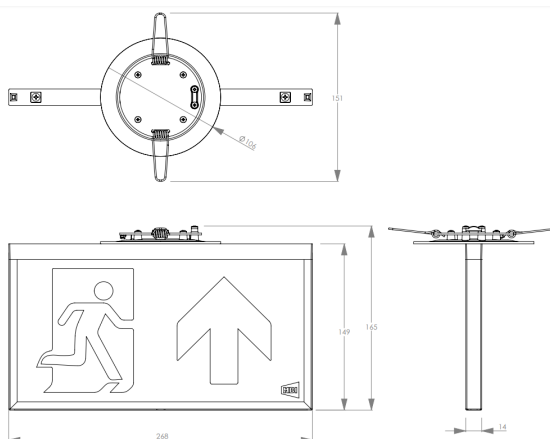

We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

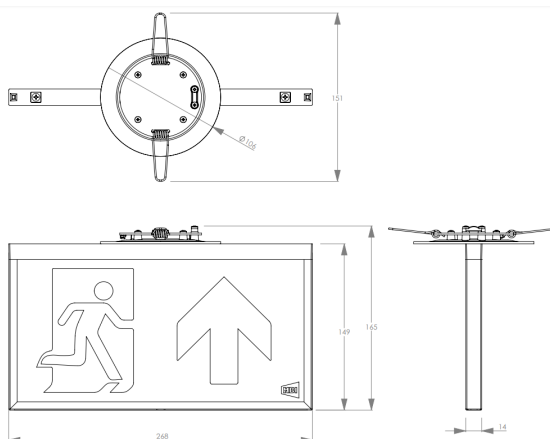

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	wit, Ral 9002
Color rendering index (Ra)	80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251555



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwersweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

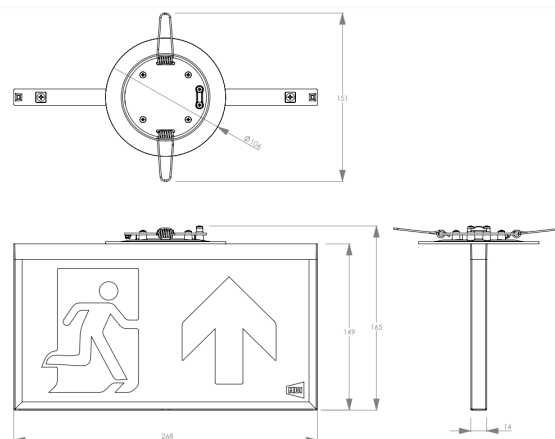

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	wit, Ral 9002
Color rendering index (Ra)	80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251548



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

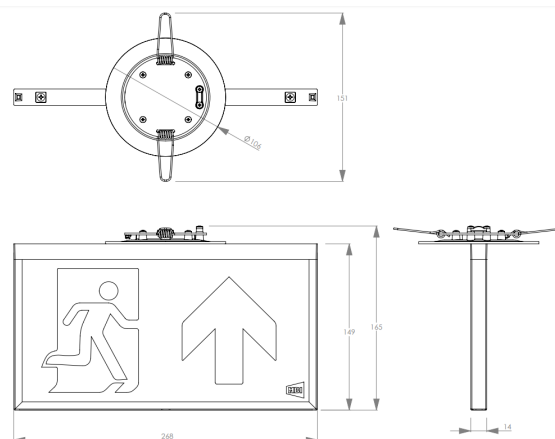

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	wit, Ral 9002
Color rendering index (Ra)	Ra 80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251531



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

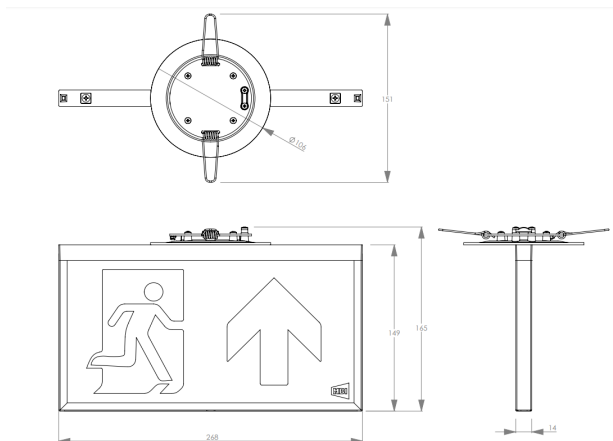

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	wit
Color rendering index (Ra)	Ra 80
Autonomy	1 of 3h
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251524



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

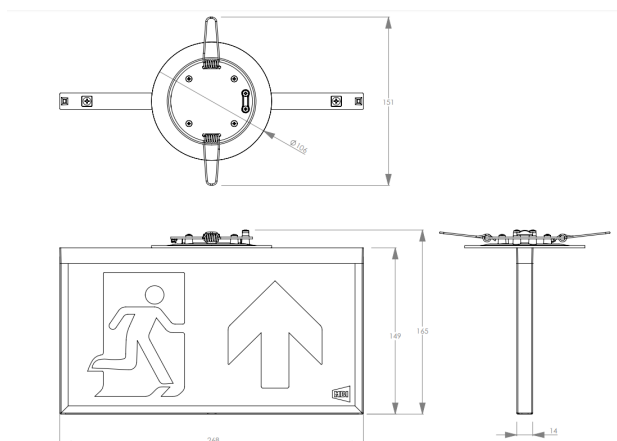

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	zwart, Ral 7021
Color rendering index (Ra)	Ra 80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251517



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwersweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

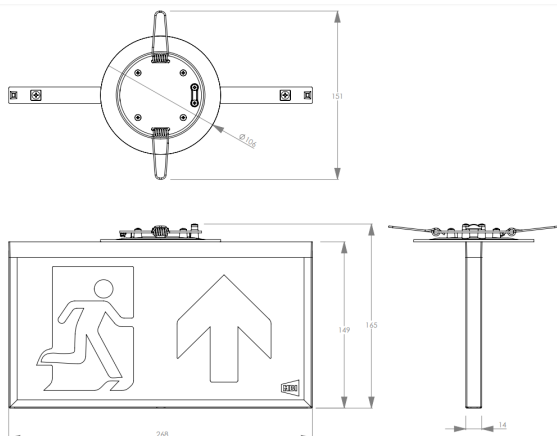

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	zwart, Ral 7021
Color rendering index (Ra)	Ra 80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251500



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

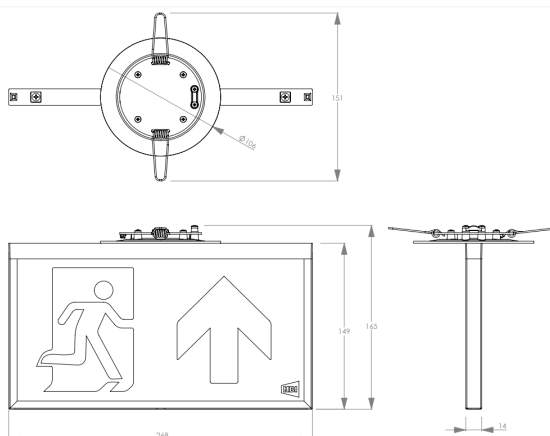

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	zwart, Ral 7021
Color rendering index (Ra)	Ra 80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251494



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

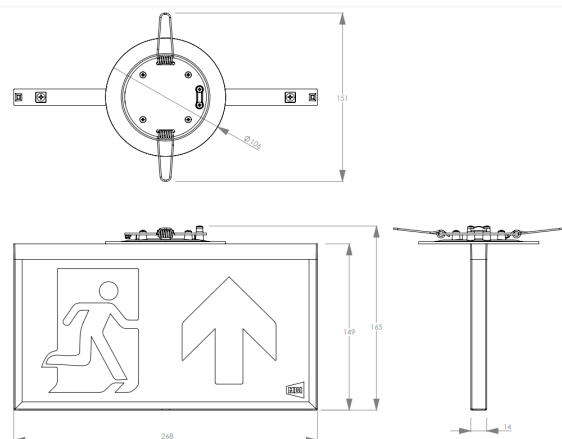

Specifications


Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Light source	Led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	zwart, Ral 7021
Color rendering index (Ra)	Ra 80
Autonomy	3 uur
reading distance (m)	25 meter
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	Ja
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251487



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

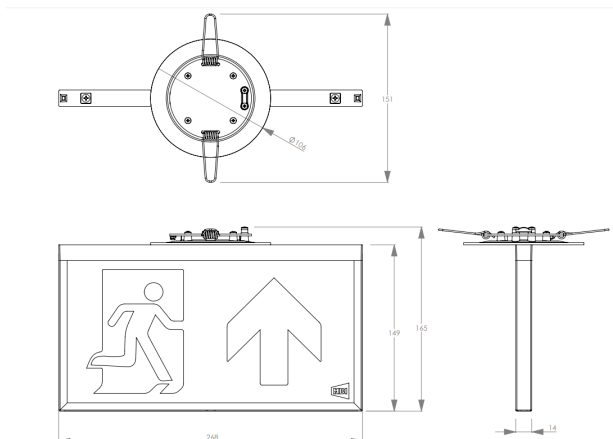

Specifications

Family	Serie 770 SEPTAGEM-D
Application	Exit sign
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	Average between -20 and +30
Color housing	Black, RAL7021
Color rendering index (Ra)	Ra80
Autonomy	1 of 3 h
Power factor	0,6
Autotest (ATS)	yes
Assembly	Recessed
Material housing	ABS, polycarbonaat
Maintained / non maintained	yes
Insulation class	Klasse III
Details/particulars	inbouwgat 80-94mm
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251470



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com