




Specifications



Family	Serie 770 SEPTAGEM-S
Application	Emergency lighting
Light source	4W LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489lm
Ambient temperature (C)	-20 tot +25
Color housing	zwart, RAL7021
Color rendering index (Ra)	>80
Autonomy	1 of 3 uur, instelbaar
Optics	High bay lens
Autotest (ATS)	yes
Assembly	Recessed , Ceiling
Material housing	polycarbonaat
Maintained / non maintained	ja / nee, instelbaar
Ingress protection	IP20
Insulation class	Klasse II
Details/particulars	Montagehoogte 7-17 meter; inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251685

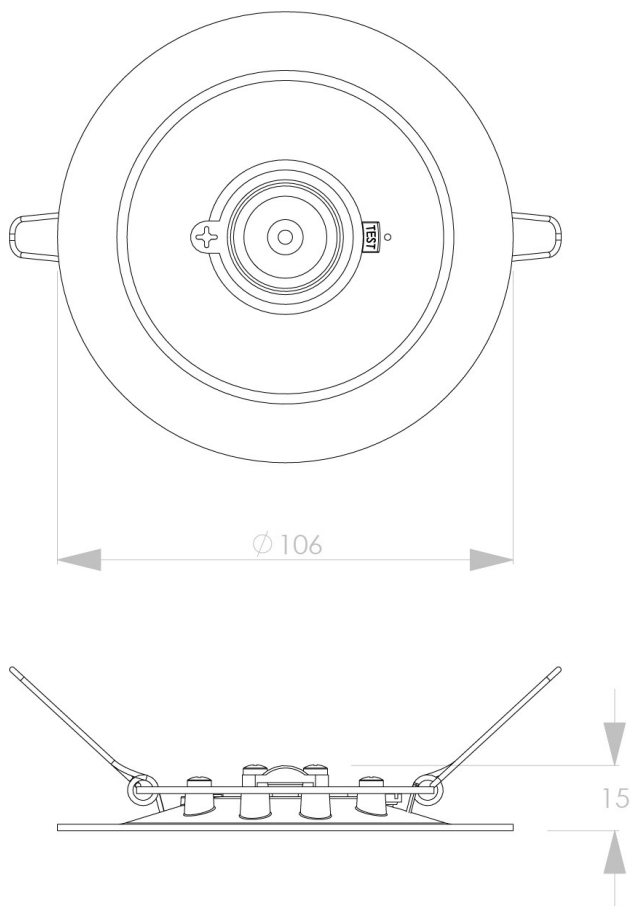

We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

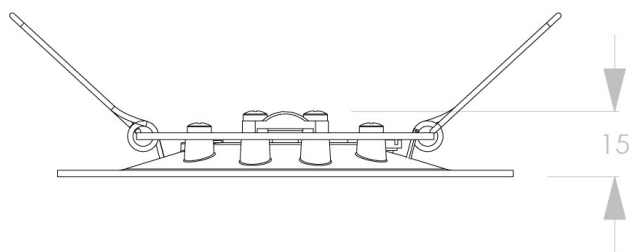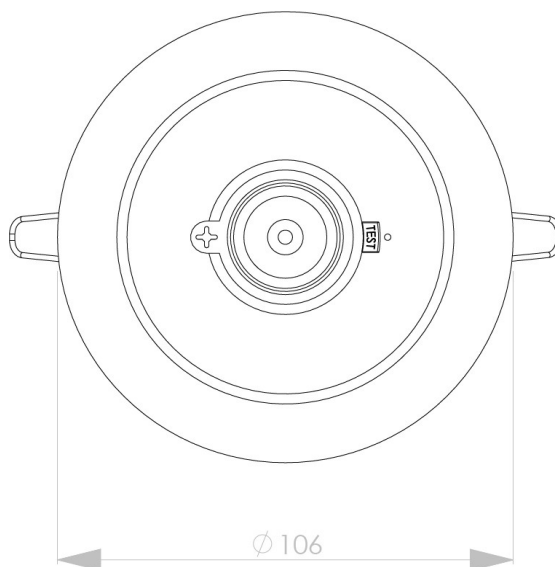

Specifications


Family	Serie 770 SEPTAGEM-S
Application	Emergency lighting
Light source	4W LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489lm
Color housing	wit, RAL9003
Color rendering index (Ra)	>80
Autonomy	1 of 3 uur instelbaar
Optics	high bay combi-lens
Autotest (ATS)	yes
Assembly	Recessed , Ceiling
Material housing	polycarbonaat
Maintained / non maintained	instelbaar
Ingress protection	IP20
Insulation class	Klasse II
Details/particulars	LoRa; montagehoogte 7-17 meter; inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2,2Ah Long Life High Temp
EAN	8720246251692



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

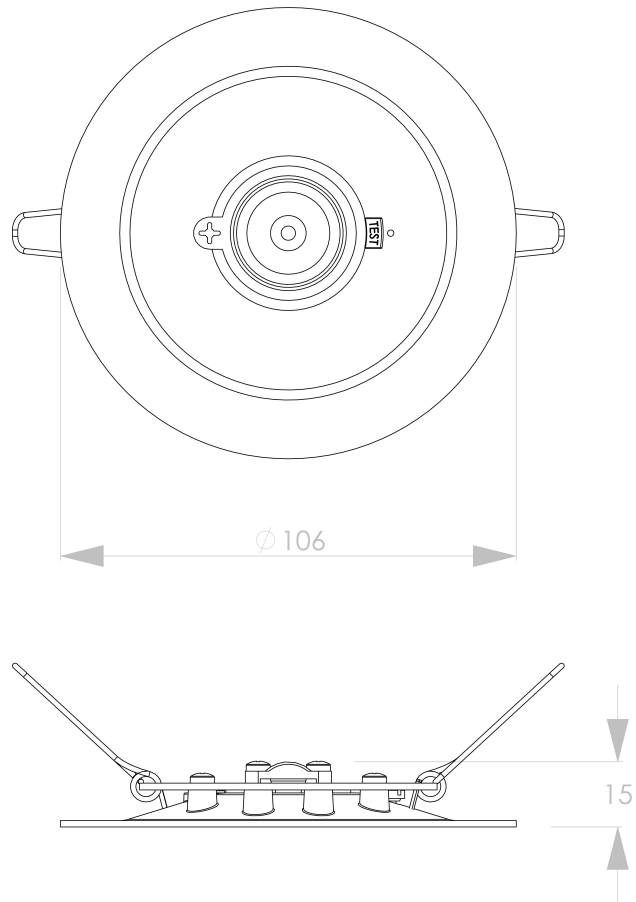

Specifications



Family	Serie 770 SEPTAGEM-S
Application	Emergency lighting
Light source	4W LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489lm
Color housing	black, RAL 7021
Autonomy	adjustable, 1 or 3 hours
Power factor	0.9
Optics	low bay combi-lens
Autotest (ATS)	yes
Assembly	Recessed , Ceiling
Material housing	Polycarbonate
Maintained / non maintained	adjustable
Ingress protection	IP20
Insulation class	Klasse II
Details/particulars	LoRa; montagehoogte tot 7 meter; inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2.2 Ah Long Life High Temp
EAN	8720246250596



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwersweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

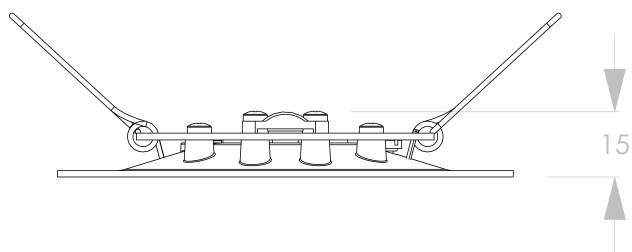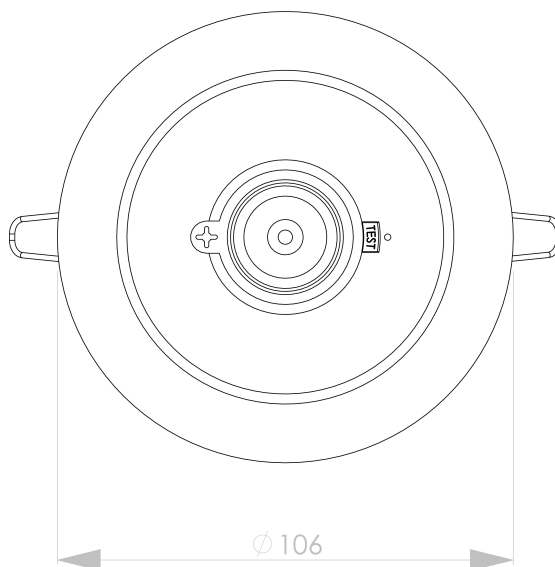

Specifications

Family	Serie 770 SEPTAGEM-S
Application	Emergency lighting
Light source	4W LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489lm
Color housing	White, RAL9003
Power factor	0.9
Optics	low bay combi-lens
Autotest (ATS)	yes
Assembly	Recessed , Ceiling
Material housing	Polycarbonate
Ingress protection	IP20
Insulation class	Klasse II
Details/particulars	LoRa; montagehoogte tot 7 meter; inbouwgat 80-94mm
Battery pack	NiMh 3,6V / 2.2 Ah Long Life High Temp
EAN	8720246250602



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com