








7UY0404HBB3 (high bay/3 hr)

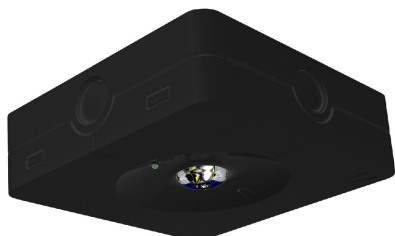

Specifications

Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	black
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	3 hours
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	ja
Ingress protection	IP41
Power consumption	0,5W - 3,2W (non-maintained)
Insulation class	Klasse II
Details/particulars	high bay lens (mounting height 7-15 meters) & 3 hours autonomy
Battery pack	2 x NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251951







We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



7UY0404HBW3 (high bay/3 hr)



Specifications



Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	white, RAL9003
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	3 hours
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable
Ingress protection	IP41
Power consumption	0,5W - 3,2W (non-maintained)
Insulation class	Klasse II
Details/particulars	high bay lens (mounting height 7-15 meters) & 3 hours autonomy
Battery pack	2 x NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251975



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

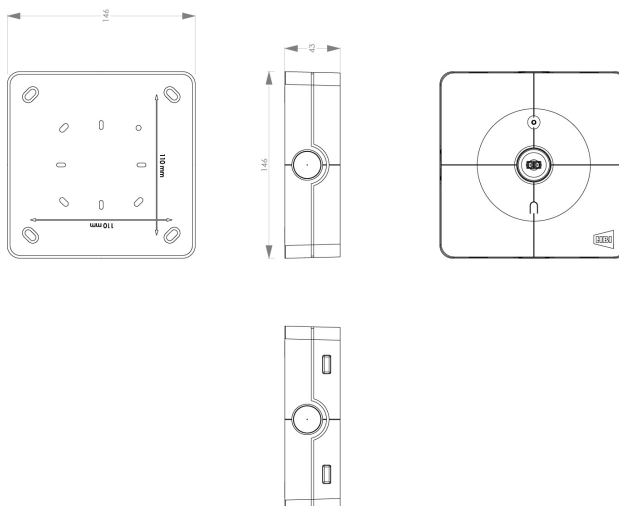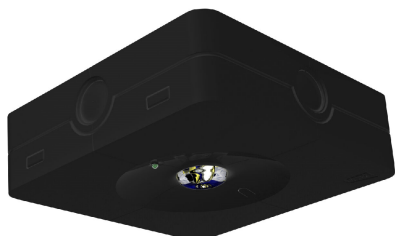

Specifications


Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	black
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	3 hours
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable
Ingress protection	IP41
Power consumption	0,5W - 3,2W (non-maintained)
Insulation class	Klasse II
Details/particulars	low bay lens (mounting height up to 7 meters) & 3 hours autonomy
Battery pack	2 x NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251937



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

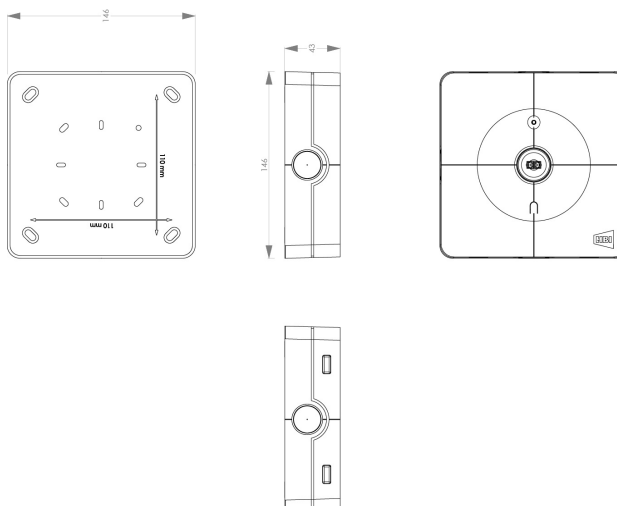

Specifications






Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	white, RAL9003
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	3 hours
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable (L1+L2)
Ingress protection	IP41
Power consumption	0,5W - 3,2W (non-maintained)
Insulation class	Klasse II
Details/particulars	low bay lens (mounting height up to 7 mters) & 3 hours autonomy
Battery pack	2 x NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251999



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

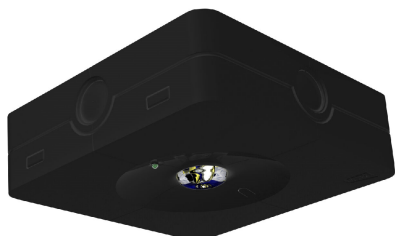

Specifications





Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	black
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	1 uur
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	IP41
Maintained / non maintained	adjustable (L1 + L2)
Ingress protection	IP41
Power consumption	0,5W - 1,3W (non-maintained)
Insulation class	Klasse II
Details/particulars	high bay lens (mounting height 7-15 meters)
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251944



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications




Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	white, RAL9003
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	1 hour
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable (L1+L2)
Ingress protection	IP41
Power consumption	0,5W - 1,3W (non-maintained)
Insulation class	Klasse II
Details/particulars	high bay lens (mounting height 7-15 meters)
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251968



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications



Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	black
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74mm
Autonomy	1 uur
Impact resistance	IK08
Optics	Low Bay lens (max. 7 meter)
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	instelbaar (L1+L2)
Ingress protection	IP41
Power consumption	0,5W - 1,3W (non-maintained)
Insulation class	Klasse II
Details/particulars	met railadapter
Battery pack	NiMh 3,6V 2,2A Long Life High Temp
EAN	8720246252453



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

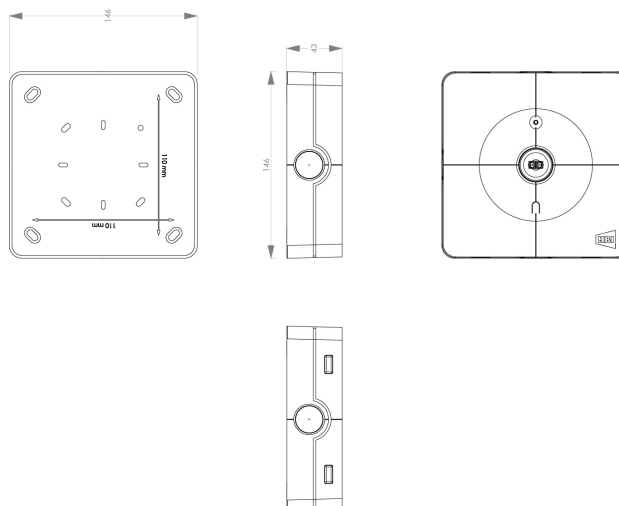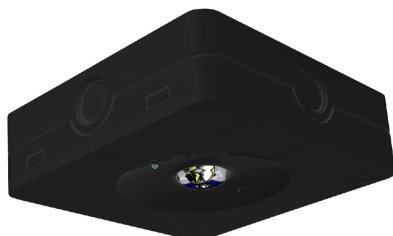

Specifications




Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	black
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	1 hour
Impact resistance	IK08
Power factor	0,45
Optics	lens
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable (L1+L2)
Ingress protection	IP41
Power consumption	0,5W - 1,6W. Average: 0,7W
Insulation class	Klasse II
Details/particulars	low bay lens (mounting height up to 7 meters)
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251920



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications


Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	wit
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74mm
Autonomy	1 uur
Impact resistance	IK08
Power factor	0,45
Optics	Low Bay lens (max. 7 meter)
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable (L1+L2)
Ingress protection	IP41
Power consumption	0,3W - 1,3W (non-maintained)
Insulation class	Klasse II
Details/particulars	met railadapter
Battery pack	NiMh 3,6V 2,2A Long Life High Temp
EAN	8720246252460



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

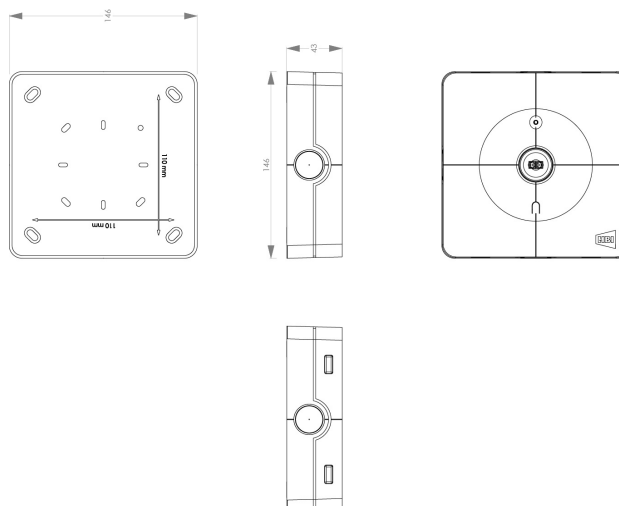

Specifications

Family	Serie 770 SEPTAGEM-U
Application	Emergency lighting
Light source	led
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Luminous flux (lm) emergency	489
Ambient temperature (C)	-20°C - +30°C
Color housing	wit, RAL9003
Color rendering index (Ra)	>70
Sizes of packaging (LxWxH)	270 x 148 x 74 mm
Autonomy	1 hour
Impact resistance	IK08
Power factor	0,45
Optics	lens
Autotest (ATS)	yes
Assembly	Surface mount
Material housing	polycarbonate
Maintained / non maintained	adjustable (L1+L2)
Ingress protection	IP41
Power consumption	0,5W - 1,6W. Average: 0,7W
Insulation class	Klasse II
Details/particulars	low bay lens (mounting height up to 7 meters)
Battery pack	NiMh 3,6V 2,2A Long Life / High Temp
EAN	8720246251982



We reserve the right to alter specifications.

Datum download PDF: 14-09-2026

HBI Bisscheroux | Hofdarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com