




Specifications


Family	Serie 800 ATEX
Application	Emergency lighting
Light source	LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	-20 - +40
Color housing	grey
Color rendering index (Ra)	>80
Autonomy	1 uur
Impact resistance	IK08
Autotest (ATS)	yes
Assembly	Surface mount
Maintained / non maintained	1 uur
Ingress protection	IP66
Insulation class	Klasse I
Details/particulars	ATEX explosieveilig; Gas: Ex db eb [ia] IIA/IIB/IIC – Zone 1 en 2; Dust: Ex tb IIIC – Zone 21 en 22
Battery pack	3,6V 2,2A NiMh Long Life for ATEX
EAN	8720246253115

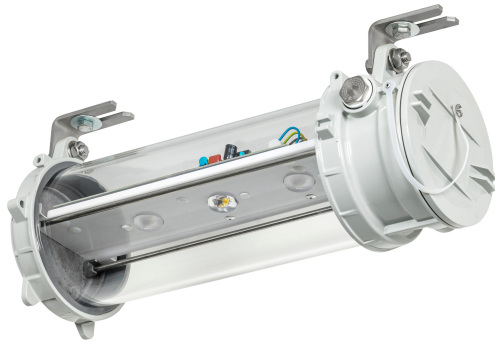

We reserve the right to alter specifications.

Datum download PDF: 24-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com

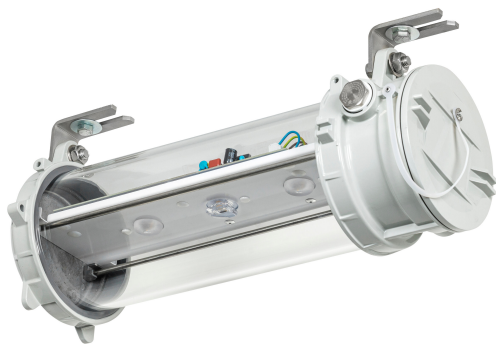

Specifications

Family	Serie 800 ATEX
Application	Emergency lighting
Light source	LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	-20 - +40
Color housing	grey
Color rendering index (Ra)	>80
Autonomy	1 uur
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Maintained / non maintained	1 uur
Ingress protection	IP66
Insulation class	Klasse I
Details/particulars	ATEX explosieveilig; Gas: Ex db eb [ia] IIA/IIB/IIC – Zone 1 en 2; Dust: Ex tb IIIC – Zone 21 en 22
Battery pack	3,6V 2,2A NiMh Long Life for ATEX
EAN	8720246253108



We reserve the right to alter specifications.

Datum download PDF: 24-09-2026

HBI Bisscheroux | Hofdwarsweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com



Specifications

Family	Serie 800 ATEX
Application	Exit sign
Light source	LED
Functionality	battery pack
LoRa node	yes
Supply	230V AC/DC
Color Temperature (K)	4000K
Ambient temperature (C)	-20 - +40
Color housing	Grey
Color rendering index (Ra)	>80
Autonomy	1 uur
reading distance (m)	24
Impact resistance	IK08
Power factor	0,45
Autotest (ATS)	yes
Assembly	Surface mount
Maintained / non maintained	Yes
Ingress protection	IP66
Power consumption	3,2W
Insulation class	Klasse I
Details/particulars	ATEX explosieveilig; Gas: Ex db eb [ia] IIA/IIB/IIC – Zone 1 en 2; Dust: Ex tb IIIC – Zone 21 en 22
Battery pack	3,6V 2,2A NiMh Long Life for ATEX
EAN	8720246253122



We reserve the right to alter specifications.

Datum download PDF: 24-09-2026

HBI Bisscheroux | Hofdwarweg 14 | 6161 DD Geleen | T: +31 (0)46 - 475 65 72 | E: info@hbi-lighting.com